



Specialty / Industrial



Rotary Printing Option for VJ-626UF

Specifically developed for Mutoh's ValueJet 626UF A2-size UV LED flatbed printer, Mutoh's rotary printing option will allow worry-free 360-degrees direct printing onto cylindrical objects. The rotary rollers will precisely rotate the cylindrical object under the head shuttle, ensuring maximum print quality.

Equipped with a carrying handle, the rotary printing option can easily be loaded and unloaded. Setup is done in no time via a wizard integrated in the VJ-626UF machine firmware. Job preparation for cylindrical objects is fully integrated in the standard VJ-626UF driver software, so that jobs can easily be positioned and scaled in function of the target object diameter and position.

A ruler alongside the object will facilitate the positioning of one or multiple cylindrical objects. Diameter adjustment is fast and easy using thumbscrew adjusters.


Product Highlights

- Rotary printing option for ValueJet 626UF A2-size flatbed UV LED printer
- 360-degrees direct printing onto cylindrical objects
- For diameter sizes from 30 mm to 120 mm
- For object lengths up to 360 mm and weights up to 1 kg
- Easy mounting and unmounting, configuration via wizard guidance
- User friendly : carrying handle, positioning ruler, object position retainer & fixation thumbscrews
- Ideal for customised quality production and one-off designs

Application Possibilities

Ideal for prototypes, one-off designs and high quality, multi-layer prints on bottles, decorative candles, stainless steel or aluminium containers, cardboard rolls, etc.



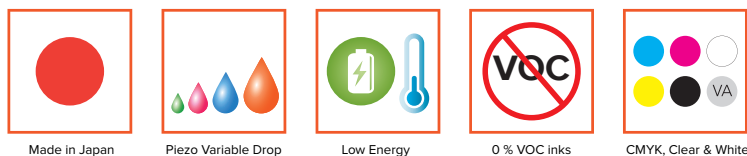

Technical Key Specifications

Compatibility Specifically developed for Mutoh's ValueJet 626UF A2-size 6-colour flatbed UV LED printer (CMYK, White & Clear inks)
For printing on cylindrical objects with smooth surface and even weight distribution(*)

Environmental conditions 22° - 30° C / 40% - 60% RH

Minimum Object Diameter Ø 30 mm (1.18")

Maximum Object Diameter Ø 120 mm (4.72")

Diameter Ranges Narrow range: Ø 30 mm (1.18") - Ø 80 mm (3.14")
Wide range: Ø 60 mm (2.36") - Ø 120 mm (4.72")

Maximum Object Mass 1 kg (2.2 lbs)

Print Circumference Coverage 0° - 360°

Printing Mode 720 x 1080 dpi

Dimensions 638 × 568.5 × 173.0 mm (25.12" x 22.38" x 6.81")

Weight 5.54 kg (12.21 lbs)

- Features**
- Easy load/unload/set-up wizard
 - Carrying handle
 - Positioning ruler
 - Object wandering prevention retainer
 - Diameter range selection
 - Software support

- Accessories**
- Paper guide bar for checking the head height
 - Print table allowing nozzle check with rotary accessory mounted

*: Roundness, straightness and parallelism of the object are important. It is recommended that the surface of your target object lies between two co-axial cylindrical surfaces having a radial separation of 0,5 mm.

Distributed by

